

SERVICING SCHEDULE 2006

Lubricants

PEUGEOT RECOMMANDE **TOTAL**



TOTAL



1999 - Merger of the TOTAL and PETROFINA Groups
2000 - Merger of the TOTALFINA and ELF Groups

TOTAL

The 5th world oil group
Lubricants

No. 3 in Europe (16% of the automotive market)
Leading supplier for the PEUGEOT network in France,
in Europe and worldwide



1998 - FIRST PEUGEOT-TOTAL PARTNERSHIP CONTRACT
2001 - WORLDWIDE CONTRAT BETWEEN PEUGEOT AND TOTAL
2004 - **TOTAL LUBRICANTS EXCLUSIVELY RECOMMENDED BY
PEUGEOT**



PEUGEOT has defined maintenance cycles for each type of vehicle.

ALL PSA-APPROVED TOTAL PRODUCTS ARE PERFECTLY ADAPTED TO ALL TYPES OF SERVICING..

The vehicle's service cycle depends on the type of use:

- "normal" conditions :

e.g. for 207 1,6L: services every 30,000 km or 2 years

- conditions for "special use" :

e.g. for 207 1,6L: services every 20,000 km or 1 year

See details for each vehicle in the following table

Note: Conditions for "special use" means basically urban use (door-to-door, taxi, etc.), short-distance trips (cold engines), use of fuels of doubtful quality (sulphur levels greater than 500 ppm), tropical climates (temperature often over 30°C), cold climates (temperature often below -15°C), highly polluted atmospheres (dusty, etc.).

| | | Service* every: | | | |
|-----------------------|---|--|--|------------------------------|--|
| Special conditions: | 10,000 km or 1 year | 15,000 km or 1 year | 20,000 km or 1 year | 30,000 km or 1 year | |
| Standard conditions: | 15,000 km or 2 years | 20,000 km or 2 years | 30,000 km or 2 years | 40,000 km or 2 years | |
| PETROL | 107 1.0L (15,000 km or 1 year) | 206 2.0L 16S 180 hp 307 2.0L 16S 180 hp | 206 1.1L – 1.4L – 1.6L – 2.0L 207 1.4L – 1.6L 307 1.4L – 1.6L – 2.0L 407 1.8L – 2.0L – 2.2L – 3.0L 607 2.2L – 3.0L 807 2.0L 1007 1.4L – 1.6L Partner 1.1L – 1.4L – 1.6L Expert 2.0L | | |
| | 206 D 1.9L | 206 HDI 1.6L 207 HDI 1.6L 307 HDI 1.6L 407 HDI 1.6L | 107 HDI 1.4L 206 HDI 1.4L – 2.0L 207 HDI 1.4L 307 HDI 2.0L 407 HDI 2.0L – 2.2L – 2.7L 607 HDI 2.0L – 2.2L – 2.7L 807 HDI 2.0L – 2.2L 1007 HDI 1.4L | Boxer HDI 2.2L – 3.0L | |
| DIESEL and DIESEL HDI | Partner D 1.9L Expert D 1.9L | Partner HDI 1.6L – 2.0L | Expert HDI 2.0L | | |

MAG/MPC & CAF/TQF – 07/2006

* Servicing must be done when the first of the two terms is reached

With extended drain intervals, special attention must be given to the choice of lubricant (approved and recommended lubricants), it is recommended that the oil level be regularly checked:

Topping up the engine oil between two oil changes is normal



The PEUGEOT Servicing Schedule specifies and recommends an intermediate visit (during the oil change interval) for a check and to top up the levels where necessary:

Engine oil, coolant, windscreen washer fluid.


To prevent risks inherent in using the vehicle, e.g. oil level too low, **PEUGEOT recommends** that the levels be checked **at least every 3,000 km or every 5,000 km** depending on the operating conditions, with top-ups where necessary.

Each constructor has specific lubrication requirements. **PSA PEUGEOT CITROEN** has its own oil performance levels with additional properties adapted to the specific features of its engines.

Extract from PEUGEOT's "All About Lubricants" Guide:

"The TOTAL lubricants recommended by PEUGEOT are approved to severity levels defined by PEUGEOT and which exceed those of the ACEA and API standards.

Therefore these lubricants meet the latest technical innovations and optimise the operation of PEUGEOT engines (efficiency, fuel economy, pollutant emissions, lifetime and wear).

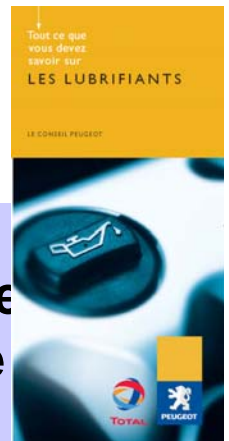

QUARTZ INEO ECS SAE 5W-30
PSA E05/D05 Level Low SAPS

ACEA C2 & A5 / B5



FUEL ECONOMY

DPF SERVICING

HIGH PERFORMANCE



QUARTZ Energy 9000 SAE 0W-30
PSA E05/D05 Level 3

Product rather for "Cold Weather"

ACEA A3 / B4
API SL / CF

MB 229.5 – BMW longlife oil 01
VW 502.00 / 505.00 – lev. GM-LLA025 / B025

100% SYNTHETIC

QUARTZ 9000 SAE 5W-40
PSA E05/D05 Level 3

ACEA A3 / B4
API SL / CF

MB 229.3 – lev. VW 502.00 / 505.00
BMW longlife oil 98

HIGH PERFORMANCE



QUARTZ 7000 SAE 10W-40
PSA E04/D04 Level 2

ACEA A3 / B3
API SL / CF
MB 229.1 - VW 505.00

PERFORMANCE

QUARTZ 5000 SAE 15W-40
PSA E04/D04 Level 1

ACEA A2 / B2
API SL / CF

STANDARD



QUARTZ INEO ECS

SAE 5W-30



- > Fuel economy: 1 tankful saved each year*.
- > Environment friendly: 1 tonne less CO2 emissions**.
- > Diesel Particulate Filters (DPF): Improves DPF efficiency by reducing ash production.
- > Improved anti-wear and anti-oxidation properties

Restricted usage on certain vehicles: see table page 8

New generation oil giving lower fuel consumption and lower CO2 emissions. Highly recommended for DPF servicing since it optimises Diesel Particulate Filter operation.

QUARTZ 9000

SAE 5W-40



- > High performance oils designed for all recent vehicles.
- > Maximum protection in all circumstances and for all types of driving.
- > Performance particularly stable over time, during cold starting and at high temperatures.



QUARTZ 70000

SAE 10W-40



- > Specially designed to keep the engine clean and provide long-term anti-wear protection for the engine's most sensitive parts.
- > Perfectly adapted to normal driving.
- > Longer engine life.

Restricted usage on certain vehicles: see table page 8

QUARTZ 5000

SAE 15W-40



- > Designed to protect the engine against wear. In all seasons.
- > Normal on-road driving
- > **For 107 petrol-engined vehicles only.**

"Very cold weather" (temperature often below -15°C):

QUARTZ ENERGY 9000 0W-30 is specially recommended for "very cold weather" conditions.

Tropical climates (temperature often over 30°C):

In countries with "tropical" climates, QUARTZ 7000 15W-50 oil can replace QUARTZ 7000 10W-40

Use of a mineral oil in PEUGEOT vehicles:

Mineral is not authorised for maintenance of PEUGEOT vehicles, except for the petrol 107 and vehicles manufactured before 1998.



Oil restriction table

QUARTZ INEO ECS SAE 5W-30 oil combines **Anti-pollution** and **Fuel Economy** performances. For the engines for which it is adapted, it contributes to PEUGEOT's objective to control fuel consumption and pollutant gas emissions.

It is highly recommended for vehicles equipped with Diesel Particulate Filters.

| Oil description | | Semi-synthetic 10W-40 | Synthetic 5W-40 | Synthetic anti-pollution 5W-30 | Synthetic 0W-30 |
|---------------------|-------------------------|-----------------------|-------------------|--------------------------------|--------------------------|
| Huiles recommandées | | QUARTZ 7000 10W-40 | QUARTZ 9000 5W-40 | QUARTZ INEO ECS 5W-30 | QUARTZ ENERGY 9000 0W-30 |
| MOTEURS | | | | | |
| PETROL | 1.8L – 2.0L et 2.2L (*) | ● | ● | ▲ | ▲ |
| | 2.0L 16S 180 hp (**) | ▲ | ● | ▲ | ▲ |
| | Other engines | ● | ● | ● | ● |
| DIESEL | HDI FAP (with DPF) | ● | ● | ● | ▲ |
| | Other engines | ● | ● | ● | ● |

● authorised


▲ not authorised

(*) engines: EW7A, EW10A, EW12J4 and EW12EJ4

(**) engines: EW10J4S




Viscosity ranges according to the ambient temperature variations.

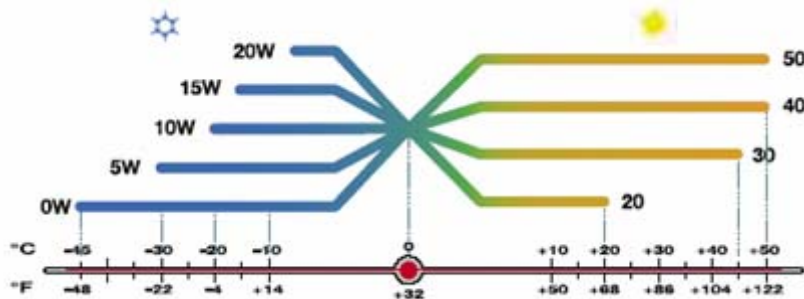

Other recommended products

| | | |
|--|---|-----------------------------------|
| Manual transmission | TOTAL Transmission BV 75W-80 | PR 9730.A2 |
| | For 107 | PR 9730.A8 |
| Automatic transmission | 4HP20 and AL4 | PEUGEOT special oil PR 9736.22 |
| | AM6 | PEUGEOT special oil PR 9980.D4 |
| Power steering | TOTAL FLUIDE AT42 | PR 9730.A6 |
| | TOTAL FLUIDE DA (206 HDI 110 hp, 307, 407 and all vehicles in cold countries) | PR 9730.A5 |
| Transfer box and front and rear hypoid axles | TOTAL Transmission X4 SAE 80W-90 | PR 9730.A7 |
| Brake system | PEUGEOT DOT4 | |
| Cooling system | PROCOR TM 108 / Glysantin G33 or Revkogel 2000 Mandatory -35°C protection | |
| | For 107 Petrol | PR 9735Y5 |
| | For 107 Diesel | PR 9735K1 |



MANUAL TRANSMISSIONS


TOTAL TRANSMISSION BV SAE 75W80 oil is recommended for most of the lifetime-lubricated manual gearboxes. However, if work is carried out on the gearbox, the transmission fluid must be replaced by a new product.

TOTAL TRANSMISSION BV SAE 75W80 is the first fill product used on PSA assembly lines.



BRAKE FLUID


The brake fluid must be replaced every 60,000 km or every 2 years. Except for the **BOXER** where the brake fluid must be replaced every 80,000 km or every 3 years.



Engine

TOTAL QUARTZ INEO ECS
TOTAL QUARTZ 9000 5W-40
TOTAL QUARTZ 7000 10W-40 (15W-50)
TOTAL QUARTZ 5000 15W-40* (20W-50)

* May be used on 107 petrol vehicles only and vehicles manufactured before 1998



Manual transmission

TOTAL Transmission BV 75W-80

Transfer box and Rear axle

TOTAL Transmission X4 80W-90



Power Steering

TOTAL Fluide DA
TOTAL Fluide ATX
TOTAL Fluide AT 42



TOTAL

Recommended products



PEUGEOT RECOMMANDE TOTAL




107

107

| P/D | MODEL |
|-----|----------------|
| P | 1.0e 12V 68 hp |
| D | 1.4L HDi 54 hp |

* Normal nonsevere conditions

| ENGINE | DRAIN INTERVAL* | TOTAL RECOMMENDED LUBRICANTS | | | | |
|--------|----------------------|------------------------------|---------------------|--------------------|--------------------------------|-------------------------|
| | | PETROL | 15,000 km or 1 year | QUARTZ INEO ECS | QUARTZ Energy 9000 0W-30 | QUARTZ 9000 5W-40 |
| DIESEL | 30,000 km or 2 years | - | | | | |



Manual transmission

PR 9730.A8



Brakes

Peugeot DOT 4 (replace every 2 years)



Cooling system

PR 9735 Y5 (petrol) / PR 9735 K1 (diesel)





1007


1007

| P/D | MODEL |
|-----|-------------------------------------|
| P | 1,1L 60 hp |
| P | 1.4L 75 ch or 1,4L 16v 90 hp |
| P | 1.6L 16v 110 hp |
| D | 1.4L HDi 70 hp |
| D | 1,6 L 16v HDi DPF 110 hp (1) |

**(1) HDI engines equipped with DPF:
Do not use
QUARTZ Energy 9000 0W30**

* Normal nonsevere conditions

| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|--------|----------------------|------------------------------|---|----------------------|-----------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W-30 (1) | QUARTZ 9000 5W-40 | QUARTZ 7000 10W-40 |
| DIESEL | 30,000 km or 2 years | | | | |



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Power Steering

TOTAL FLUIDE AT42



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKOGEL 2000 or GLYSANTIN G33



PEUGEOT RECOMMANDE TOTAL

206

| P/D | MODEL |
|-----|------------------------------|
| P | 1.1L 60 hp |
| P | 1.4L 75 hp / 1,4 16v 90 hp |
| P | 1.6L 16v 90 & 110 hp |
| P | 2.0L 16v 137 hp |
| P | 2,0L 16S 177 hp (2) |
| D | 1.4 HDi 70 hp |
| D | 1.6 HDi 16v 110 hp (DPF) (1) |
| D | 1.9 D |
| D | 2.0 HDi 90 hp |

(1) HDi engines equipped with DPF:
Do not use
QUARTZ Energy 9000 0W-30

(2) For 2.0L 16S 177 hp petrol engines:
Only product authorised: QUARTZ 9000 5W-40
Oil change interval: 20,000 km or 2 years



206

** Normal nonsevere conditions


| ENGINE | DRAIN INTERVAL* | TOTAL RECOMMENDED LUBRICANTS | | | |
|------------------------|----------------------|------------------------------|-----------------------------|---------------------|-------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W30 | QUARTZ 9000 5W40(2) | QUARTZ 7000 10W40 |
| Petrol 2.0i 16V 137 hp | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W30 | | QUARTZ 7000 10W40 |
| Petrol 2.0i 16V 177 hp | 20,000 km or 2 years | - (2) | - (2) | | - |
| DIESEL (HDi) | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W30 (1) | | QUARTZ 7000 10W40 |
| 1.6 HDi 16V | 20,000 km or 2 years | | | | |
| DIESEL 1.9 D | 15,000 km or 1 year | | | | |



PEUGEOT RECOMMANDE TOTAL




206



Transmission Manuelle

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 973622



Power Steering

TOTAL FLUIDE AT42 / TOTAL FLUIDE DA for HDi 110 hp



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKOGEL 2000 or GLYSANTIN G33



PEUGEOT RECOMMANDE TOTAL



207

| P/D | MODEL |
|-----|--------------------------------------|
| P | 1.4L / 1,4L 16v 90 hp |
| P | 1.6L 16v 110 hp |
| D | 1.4L HDi 70 hp |
| D | 1.6L 16v HDi 110 hp (DPF) (1) |

(1) HDI engines equipped with
DPF: Do not use
QUARTZ Energy 9000 0W-30

207


* Normal nonsevere conditions

| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|----------------|----------------------|------------------------------|---|----------------------|-----------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W-30 (1) | QUARTZ 9000 5W-40 | QUARTZ 7000 10W-40 |
| DIESEL | | | | | |
| Diesel 1.6 HDI | 20,000 km or 2 years | | | | |



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 9736.22



Power Steering

TOTAL FLUIDE AT42



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKOGEL 2000 or GLYSANTIN G33



PEUGEOT RECOMMANDE TOTAL



307

307

| P/D | MODEL |
|-----|-------------------------------------|
| P | 1.4i 75hp / 1.4i 16V 90 hp |
| P | 1.6i 16V 110 hp |
| P | 2.0i (1) |
| P | 2.0i 16V 137 hp |
| P | 2.0i 16V 177 hp (2) |
| D | 1.4L HDi 70 hp / 1.4L HDi 16v 92 hp |
| D | 1.6L HDi 16v 110 hp (DPF) (3) |
| D | 2.0 HDi 16V 90 hp |
| D | 2.0 HDi 16V 110 hp (DPF) (3) |

(1) 2.0i except 2.0i 16v 137 hp petrol engines:
Do not use

QUARTZ Energy 9000 0W30 and QUARTZ INEO ECS

(2) 2.0L 16S 177hp petrol engines :
Only authorised: QUARTZ 9000 5W-40
Drain interval: 20,000 km or 2 years

(3) HDi engines equipped with DPF:
Do not use
QUARTZ Energy 9000 0W-30

* Normal nonsevere conditions


| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|-----------------------|----------------------|------------------------------|---------------------|---------------------|-------------------|
| PETROL | 30,000 km or 2 years | QUARTZ Energy 9000 0W30 (1) | QUARTZ INEO ECS (1) | QUARTZ 9000 5W40(2) | QUARTZ 7000 10W40 |
| 2.0i 16V 137 hp | 30,000 km or 2 years | QUARTZ Energy 9000 0W30 | QUARTZ INEO ECS | | QUARTZ 7000 10W40 |
| 2.0i 16V 177 hp | 20,000 km or 2 years | - (2) | - (2) | | - |
| DIESEL and DIESEL HDi | 30,000 km or 2 years | QUARTZ Energy 9000 0W30 (3) | QUARTZ INEO ECS | | QUARTZ 7000 10W40 |
| 1.6 HDi 16V | 20,000 km or 2 years | | | | |



PEUGEOT RECOMMANDE TOTAL




307



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 9736.22



Power Steering

TOTAL FLUIDE DA



Brakes

Peugeot DOT 4



Cooling System

PROCOR TM 108 or REVKOGEL 2000 or GLYSANTIN G33



PEUGEOT RECOMMANDE TOTAL



407

407

| P/D | MODEL |
|-----|----------------------------------|
| P | 1.8i 16v 117 hp (1) |
| P | 2.0i (1) |
| P | 2.0i 16v 137 hp |
| P | 2.2i 16v 160 hp (1) |
| P | 3.0i V6 215 hp |
| P | 3.0i 24S V6 210 hp |
| D | 1.6 HDi 110 hp (DPF) (2) |
| D | 2.0 HDi 16v (DPF) (2) |
| D | 2.2 HDi 16v 100/136 hp (DPF) (2) |
| D | 2.7 HDi V6 (DPF) (2) |

(1) 1.8i, 2.0i and 2.2i petrol engines
except 2.0i 16v 137 hp:

Do not use
QUARTZ Energy 9000 0W30
and QUARTZ INEO ECS

(2) HDi engines equipped with DPF:

Do not use
QUARTZ Energy 9000 0W30

* Normal nonsevere conditions


| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|-----------------------|----------------------|------------------------------|-----------------------------|-------------------|-------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS (1) | QUARTZ Energy 9000 0W30 (1) | QUARTZ 9000 5W40 | QUARTZ 7000 10W40 |
| 2.0i 16V 137 hp | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W30 | | QUARTZ 7000 10W40 |
| DIESEL and DIESEL HDi | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W30 (2) | | QUARTZ 7000 10W40 |
| 1.6 HDi 16V | 20,000 km or 2 years | | | QUARTZ 7000 10W40 | |



PEUGEOT RECOMMANDE TOTAL




407



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 9736.22



Power Steering

TOTAL FLUIDE DA



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKO GEL 2000 or GLYSANTIN G33



PEUGEOT RECOMMANDE TOTAL

607



607

| P/D | MODEL |
|-----|---|
| P | 2,0i (2) |
| P | 2,0i 16v 137 hp |
| P | 2.2i 16v 160hp (2) |
| P | 3,0i V6 215 hp |
| P | 3.0i V6 245 210 hp |
| D | 2.0 HDi 16v 110 hp (DPF) (1) |
| D | 2,2 HDI 16v 100 / 136 hp (DPF) (1) |
| D | 2.7 HDI V6 (DPF) (1) |

(1) HDI engines equipped with DPF:
Do not use
QUARTZ Energy 9000 0W-30

(2) 2.0 and 2.2L petrol engines:
Do not use:
QUARTZ INEO ECS and QUARTZ Energy 9000 0W-30

* Normal nonsevere conditions


| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|------------------------|----------------------|------------------------------|------------------------------------|------------------|-------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS (2) | QUARTZ Energy 9000 0W30 (2) | QUARTZ 9000 5W40 | QUARTZ 7000 10W40 |
| Petrol 2.0i 16V 137 hp | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W30 | | QUARTZ 7000 10W40 |
| DIESEL and DIESEL HDi | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W30 (1) | | QUARTZ 7000 10W40 |



PEUGEOT RECOMMANDE TOTAL



607



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 973622



Power Steering

TOTAL FLUIDE AT42



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKO GEL 2000 or GLYSANTIN G33





807

807

| P/D | MODEL |
|-----|---|
| P | 2,0i (2) |
| P | 2,0i 16v 137 hp |
| P | 2.2i 16v 160 hp (2) |
| P | 3,0i V6 215 hp |
| P | 3.0i V6 245 210 hp |
| D | 2.0 HDi 16v 90 chp |
| D | 2.0 HDi 16v 110 hp (DPF) (1) |
| D | 2,2 HDI 16v 100 / 136 hp (DPF) (1) |

(1) HDI engines equipped with DPF:
Do not use
QUARTZ Energy 9000 0W-30

(2) 2.0L and 2.2L petrol engines ewcept 2.0i 16v 137 hp:
Do not use:
QUARTZ INEO ECS and QUARTZ Energy 9000 0W-30


* Normal nonsevere conditions

| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|--------------|----------------------|-------------------------------|--|----------------------|-----------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS (2) | QUARTZ Energy 9000 0W-30 (1)(2) | QUARTZ 9000 5W-40 | QUARTZ 7000 10W-40 |
| DIESEL (HDI) | | | | | |

PEUGEOT RECOMMANDE TOTAL




807



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 973622



Power Steering

TOTAL FLUIDE AT42



Brakes

Peugeot DOT 4



Cooling System

PROCOR TM 108 or REVKO GEL 2000 or GLYSANTIN G33



PEUGEOT RECOMMANDE TOTAL

PARTNER




Partner

| P/D | MODEL |
|-----|----------------|
| P | 1,1 |
| P | 1.4 75 hp |
| P | 1.6 16v 110 hp |
| D | 1,6 Hdi 16v |
| D | 1.9 D 70 hp |
| D | 2.0 HDi 90 hp |


* Normal nonsevere conditions

| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|----------------|----------------------|------------------------------|--------------------------------|----------------------|-----------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W-30 | QUARTZ 9000 5W-40 | QUARTZ 7000 10W-40 |
| DIESEL | | | | | |
| Diesel 1.6 HDI | 20,000 km or 2 years | | | | |
| Diesel 1.9 D | 15,000 km or 2 years | | | | |



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 973622



Power Steering

TOTAL FLUIDE AT42



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKO GEL 2000 or GLYSANTIN 633




EXPERT



| P/D | MODEL |
|-----|-----------------------|
| P | 2,0L 16v |
| D | 1,9 D 70 hp |
| D | 2,0 HDI & 2,0 Hdi 16v |

* Normal nonsevere conditions

| ENGINE | DRAIN INTERVAL* | TOTAL RECOMMENDED LUBRICANTS | | | |
|----------------|----------------------|------------------------------|--------------------------------|----------------------|-----------------------|
| PETROL | 30,000 km or 2 years | QUARTZ INEO ECS | QUARTZ Energy 9000 0W-30 | QUARTZ 9000 5W-40 | QUARTZ 7000 10W-40 |
| Diesel 2.0 HDI | | | | | |
| Diesel 1.9 D | 15,000 km or 2 years | | | | |



Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 973622



Power steering

TOTAL FLUIDE AT42



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKO GEL 2000 or GLYSANTIN G33





Boxer

BOXER

| P/D | MODEL |
|-----|-------------------|
| D | 2,0 Hdi & 2,2 HDI |
| D | 3,0 HDI |


* Normal nonsevere conditions

| ENGINE | DRAIN INTERVAL * | TOTAL RECOMMENDED LUBRICANTS | | | |
|--------------|----------------------|------------------------------|--------------------------|-------------------|--------------------|
| | | QUARTZ INEO ECS | QUARTZ Energy 9000 0W-30 | QUARTZ 9000 5W-40 | QUARTZ 7000 10W-40 |
| DIESEL (HDI) | 40,000 km or 2 years | | | | |




Manual transmission

TOTAL TRANSMISSION BV 75W-80



Automatic transmission

PR 973622



Transfer box and rear axle

TOTAL TRANSMISSION X4 80W-90



Power steering

TOTAL FLUIDE AT42



Brakes

Peugeot DOT 4



Cooling system

PROCOR TM 108 or REVKO GEL 2000 or GLYSANTIN G33

